


COLOSSUS®

Excellence inside

DATASHEET

ELS12IHIDT848400N DALI- 2 DT8

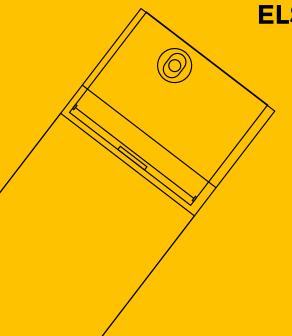

Engineered with DALI2

Version: 01



Model No. ELS12IHIDT848400N U_{IN} : 240 VAC, 0/50/60Hz | I_{IN} : 0.09A | P_{IN max}: 15W | λ > 0.90 Iоит: 100-400mA Роит max: 12W Uour : 3-48VDC ta :-20 ...+ 45°C tc max : 85°C U_{No Load}: 59VDC DALI Dimmable Constant Current Led Driver MADE IN INDIA Current Setting By NFC, Step 1mA

*Image is for viewing purpose. Technical Data not to be drawn from above image.

Approval Markings:





















Product Description

- · DALI-2 Dimmable & Tunable Constant Current Driver For Led Modules
- This driver is compatible with NFC for easy configuration.
- · Configurable parameters (operating mode, channel mode, fade time, dimming curve, CLO, min-max levels, scenes, groups, etc.)
- · Input Voltage 240VAC
- · Output Ripple Current <5% (@ Full Load, <120 Hz) Flicker Free
- High Efficiency >85% (@Full Load)
- Power Factor >0.90, THD<10%(@100%Load)
- · For use in combination with Luminaries of Protection Class II.
- · Protection against Abnormal Operating Conditions Like Short Circuit Protection, Open Voltage Protection, Overload Protection.
- Surge Protection 2KV
- · Compatible with DALI-2 & PUSH Dimming
- · Nominal Life Time: 1,00,000 hours @ tc = 45°C

Functions

- · Seamless Control via DALI-2
- CCT & Dimming Control
- Energy Efficiency And Monitoring
- · Compatible with DALI-2 accessories
- · Application oriented operation for maximum compatibility

Applications









Commercial **Spaces**

Industrial Spaces

Residential **Spaces**

Hospitality

Benefits

- 1-100% Deep Dimming, Dim to Off
- · Compatible with Sensors & PUSH Dim
- · Low Standby Power
- Smooth Transition over wide range of CCT & Intensity



— Technical Data

roommoar Bata	
Mains Voltage Supply	
Rated Voltage Range	240VAC
Rated Frequency	0/50/60 Hz
Max. Admissible Input Voltage Range(AC)	200-265VAC
Max. Admissible Input Voltage Range(DC)	180-280VDC
Total Harmonic Distortion (THD)	<10% (@Full Load)
Mains voltage withstanding capacity	300VAC for 8hrs (with overvoltage shutdown)
Output Data	
Constant current	
Output current tolerance	±5%
Max. Ripple output current(with LED Load)	<5% (@ Full Load, <120 Hz)
Max starting Time	<1s (@ Full Load by DALI System)
Interface And Dimming Operation	
Dimming Interface	DALI Dimming
PUSH Dimming	PUSH dimming (Max. lead wire length: 20m, sameport of DALI)
DALI Function	DALI dimming (Max. lead wire length: 300m) logarithm or linear dimming curve selectable 251,252,253,CLO
Dimming Range	DALI dimming: 1%-100% ,Dim to off .
CCT Range	2000K-7000K
Power Factor	
240V(@ Full Load)	>0.90
Efficiency(typ.)	
Full Load	>85%
Protections	
Open Circuit	<59VDC
Output Short Circuit Protection	YES
Overload Protection	YES



Technical Data

Connection Terminals	
Туре	Push Terminal
PRI Wire Cross Section / Length	0.5 - 1.5 ² / 8-9mm
SEC Wire Cross Section / Length	0.5 - 1.5 ² / 8-9mm
DALI Wire Cross Section / Length	0.5 - 1.5 ² / 8-9mm

Wire Lengths

Max. Wire Length To Led Module <3m

Protection

Surge	2kV
High Voltage	300V

Temperatures (Operation)

Model No.	Ambient(ta)	Case (tc)
ELS12IHIDT848400N	-25°C +45°C	Max + 85°C

Product Specifications

Model No.	Input Current (max)	Input Power (max)	THD	Power Factor	Effici- ency	Output Current	Output Voltage	Output Power (max)
ELS12IHIDT848400N	80mA	15W	<10%	>0.90	>85%	100-400mA	3-48V	12ZW


All specifications with 240 VAC are nominal operation and 100% load.


LED Current Selection


Output Current Configurable via NFC							
Output Current	100mA	150mA	200mA	250mA	300mA	350mA	400mA
Output Voltage	10-48V	7-48V	5-48V	4-48V	3.5-40V	3-34V	3-30V
Output Power	1-4.8W	1-7.2W	1-9.6W	1-12W	1-12W	1-11.9W	1-12W





Graphs






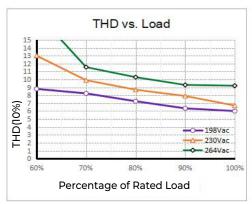





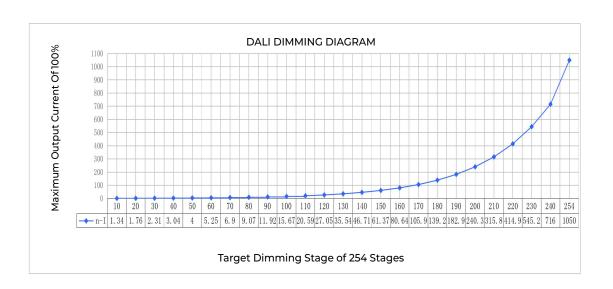


Housing Properties


Degree of protection	IP20
Casing	Polycarbonate, White




Housing Dimensions

Built-in Type



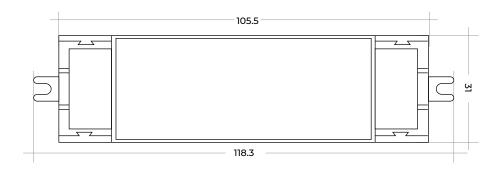

With End Caps

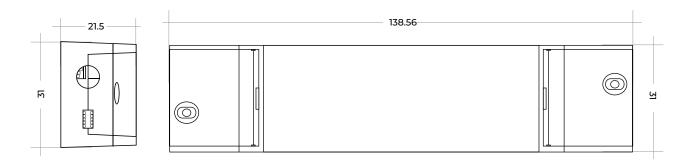

Dimensions (LxWxH)	Built-in - 118.3X31X21.5
Difficusions (EXVIXII)	With End Caps - 138.56X31X21.5
Tolerance	± 1mm
Weight	68 gm

Wiring Diagrams


DALI Dimming



Error expected. We reserve the right to make alternations in the interest of improving our products.



PUSH Dimming

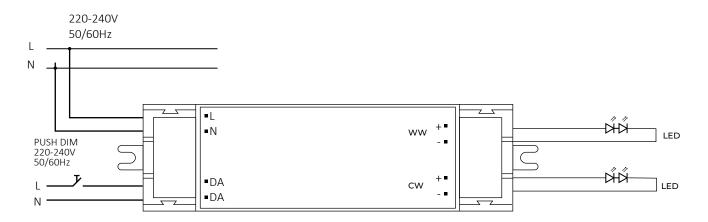

PUSH Dim Functions

Action	Action duration	Function
Short push	<0.6s	Turn on/off
Short push five Times	<3s	Quit Corridor mode
Long push	0.6-3s	Dimming up or down
Long push	10s	Sync all LEDs to be 50% brightness, and the dimming rate is changed to 3S
Long push	20s	Dimming rate is changed to 6S
Long push	>2mins	Enter Corridor mode - LED keep 100% brightness for 2mins.

Expected Lifetime

Lifetime	50,000 hours
Warranty	5 years


Logistics Data

Model No.	ELS12IHIDT848400N
Weight (gm)	68 gm



Capabilities

Compatible with DALI Sensors

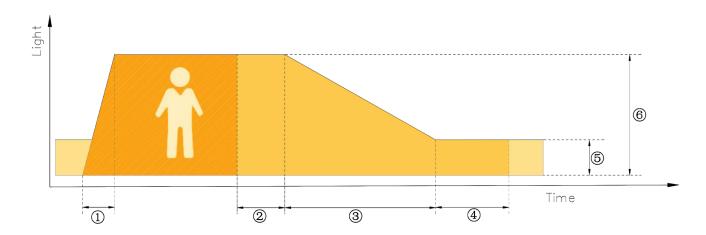

Adjustable Parameters:

- Fade-in Time: Time to ramp up to the presence value (default: 1s)
- · Run-on Time: Duration the light stays at presence level after motion ends (default: 120s)
- · Fade Time: Time to fade from presence to absence value (default: 32s)
- · Switch-off Delay: Duration the absence value is held before turning off (configurable or disabled)
- Presence Value: Brightness when motion is detected (default: 100%)
- · Absence Value: Brightness when no motion is detected (default: 10%)

This function offers flexible configuration to match specific usage scenarios and optimize lighting behavior in corridors and similar spaces.

Constant Light Output (CLO)

The CLO function maintains consistent LED brightness over time by compensating for the natural decline in light output. It does this by gradually increasing the LED driver's output current based on a user-defined curve.

Users can define up to eight (time, level) data pairs. The driver then performs linear interpolation between these points to adjust current over the product's lifetime. CLO starts from a limited minimum current set during commissioning.

· Dimming curve

The DALI interface supports two dimming curves: logarithmic (default) and linear.

Users can select the desired dimming behavior based on application requirements, Settings can be changed via Colossus NFC App.