


COLOSSUSTM


Excellence inside

DATASHEET

US12IHI40300F

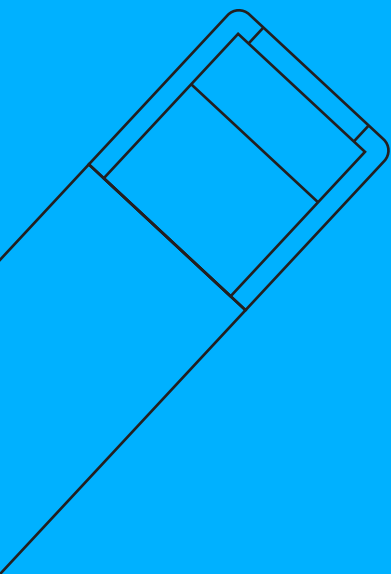

Version: 01

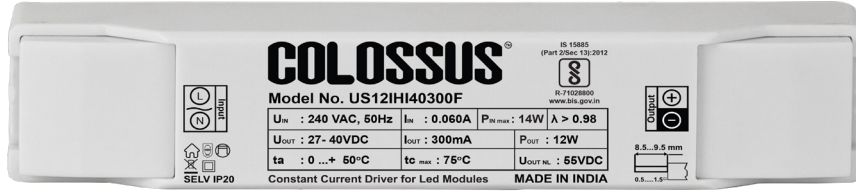

<https://colossusworld.com/>

*Image is for viewing purpose. Technical Data not to be drawn from above image.

Approval Markings:



Product Description

- Constant current driver for led modules
- Input voltage 240VAC
- High efficiency >86%(@100% Load)
- Power factor >0.98,THD<10%(@100%Load)
- For use in combination with luminaries of protection class II.
- Protection against Abnormal Operating Conditions Like Input Over Voltage Protection, Under Voltage Protection, Short Circuit Protection, Open Voltage Protection, Overload Protection.
- Surge protection 4KV
- Nominal Life Time: 30,000 hours @ $t_c \leq t_{c\max}$

Functions

- Application oriented operation for maximum compatibility

Applications



Office

Shops

House

Technical Data

Mains Voltage Supply

Rated Voltage Range	240VAC
Rated Frequency	50/60 Hz
Max. Admissible Input Voltage Range(AC)	175-265VAC
Total Harmonic Distortion (THD)	<10% (@Full Load)
Mains Voltage Withstanding Capacity	400VAC for 8hrs (with overvoltage shutdown)

Output Data

Constant current

Output Current Tolerance	±5%
Max Starting Time	<1s

Interface And Dimming Operation

Dimming Interface	None
-------------------	------

Power Factor

240V(@ Full Load)	>0.98
-------------------	-------

Efficiency(typ.)

Full Load	>86%
-----------	------

Protections

Open Circuit	<55VDC
Output Short Circuit Operation	YES
Input Over Voltage Cutoff	320VAC ±10%
Input Under Voltage Cutoff	100VAC ±10%

Connection Terminals

	For solid Or stranded wire
Type	Push Terminal
Wire Cross Section	0.5mm ² - 1.5mm ²
Wire Stripping Length	8.5mm - 9.5mm

Wire Lengths

Max. Wire Length To Led Module	<1m
--------------------------------	-----

Protection

Surge	4kV
High Voltage	400V

Temperatures (Operation)

Model No.	Ambient(ta)	Case (tc)
US12IHI40300F	0°C... +50°C	Max + 75°C


Product Specifications

Model No.	Input Current (max)	Input Power (max)	THD	Power Factor	Efficiency	Output Current	Output Voltage	Output Power (max)
US12IHI40300F	60mA	14W	<10%	>0.98	>86%	300mA	27-40V	12W


All specifications with 240 VAC are nominal operation and 100% load.

Graphs


Operating Window

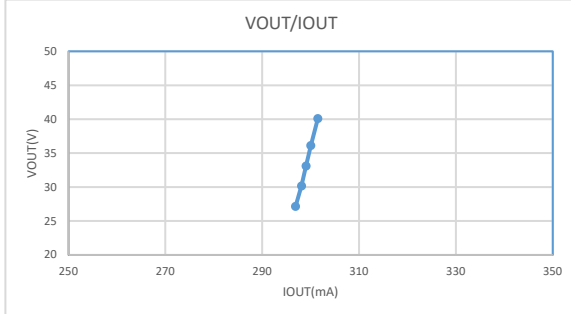

Efficiency Vs Output Power

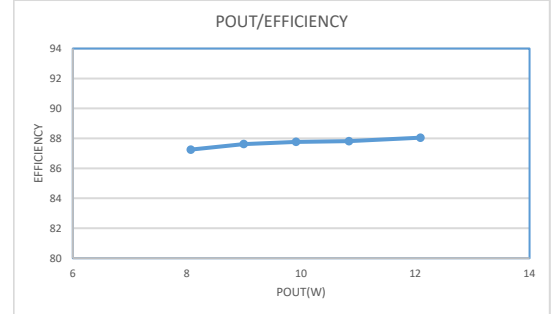


THD Vs Output Power

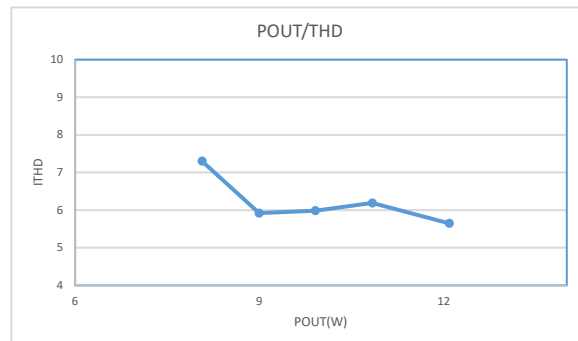

Housing Properties


Degree of protection	IP20
Casing	Polycarbonate, White

Housing Dimensions

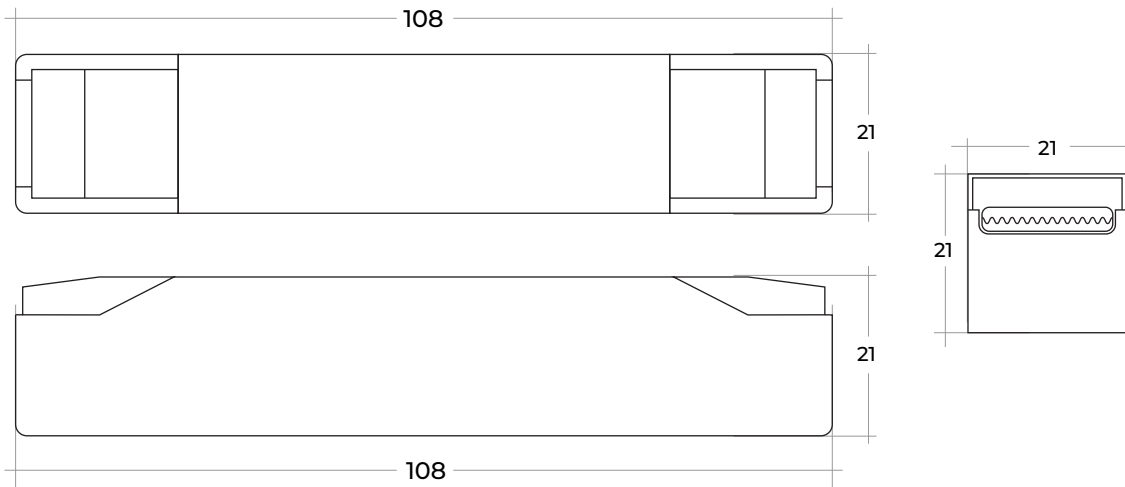

Dimensions	108x21x21mm
Tolerance	± 1mm
Weight	40 gm

Wiring Diagrams

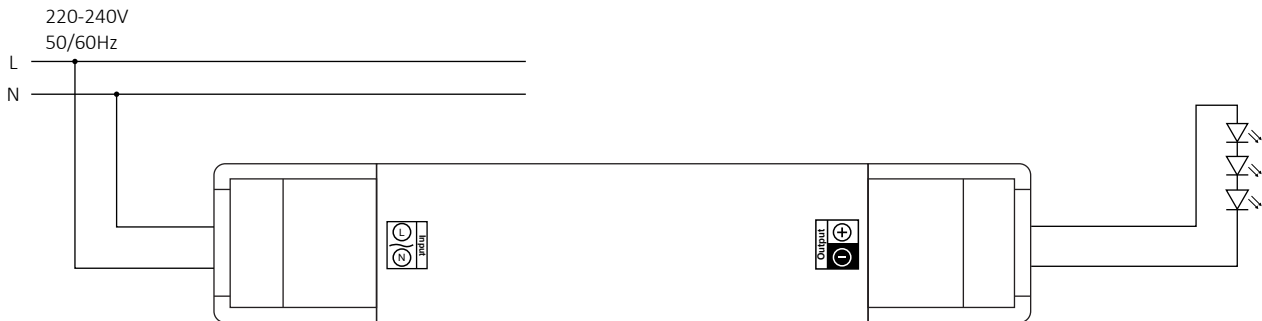

Expected Lifetime

Lifetime	30,000 hours
Warranty	3 years

Logistics Data

Model No.	US12IH140300F
Weight (gm)	40 gm

Note: 3-Year Warranty: Includes 2.5 years product coverage and 6 months storage warranty under specified conditions.
For more information, visit: <https://colossusworld.com/>
Error expected. We reserve the right to make alternations in the interest of improving our products.