


# COLOSSUS<sup>TM</sup>

*Excellence inside*



**DATASHEET**

---

**VS60ISI125000F**

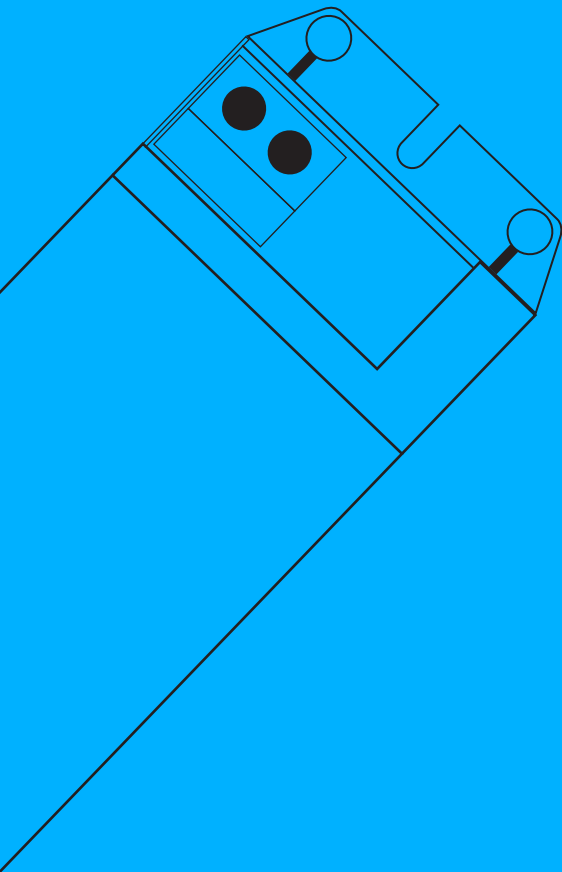

Version: 01

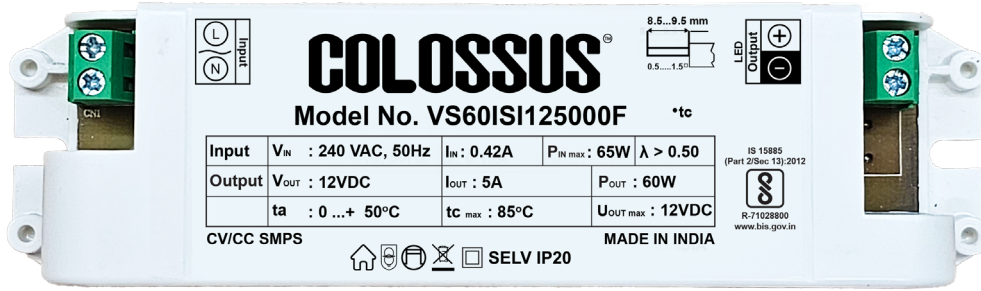

<https://colossusworld.com/>

\*Image is for viewing purpose. Technical Data not to be drawn from above image.

### Approval Markings:



### Product Description

- CV/CC Driver for led modules
- Input Voltage 240VAC
- High efficiency >86%(@100% Load)
- Power factor >0.50 (@100%Load)
- For use in combination with luminaries of protection class II.
- Protection against Abnormal Operating Conditions Like Open Voltage Protection, Overload Protection & Short Circuit Protection.
- Surge protection 2.5KV
- Nominal Life Time: 30,000 hours @ tc ≤ tc<sub>max</sub>

### Functions

- Application oriented operation for maximum compatibility

### Applications



## Technical Data

### Mains Voltage Supply

Rated Voltage Range	240VAC
Rated Frequency	50/60 Hz
Max. Admissible Input Voltage Range(AC)	175-265VAC
Mains Voltage Withstanding Capacity	320VAC for 2hrs

### Output Data

#### Constant current

Output Current Tolerance	±5%
Max Starting Time	<1s

### Interface And Dimming Operation

Dimming Interface	None
-------------------	------

### Power Factor

240V(@ Full Load)	>0.50
-------------------	-------

### Efficiency(typ.)

Full Load	>86%
-----------	------

### Protections

Open Circuit	<13VDC
Output Short Circuit Operation	Yes
Input Over Voltage Cutoff	None
Input Under Voltage Cutoff	None

### Connection Wires

Type	Terminal Block
Wire Cross Section	0.5mm <sup>2</sup> - 1.5mm <sup>2</sup>
Wire Stripping Length	8.5-9.5mm

### Wire Lengths

Max. Wire Length To Led Module	<1m
--------------------------------	-----

### Protection

Surge	2.5kV
High Voltage	320V

### Temperatures (Operation)

Model No.	Ambient(ta)	Case (tc)
VS60ISI125000F	0°C... +50°C	Max + 85°C


### Product Specifications

Model No.	Input Current (max)	Input Power (max)	THD	Power Factor	Efficiency	Output Current	Output Voltage	Output Power (max)
VS60ISI125000F	420mA	65W	N.A	>0.50	>86%	5000mA	12V	60W


All specifications with 240 VAC are nominal operation and 100% load.

### Graphs


Operating Window (CV)

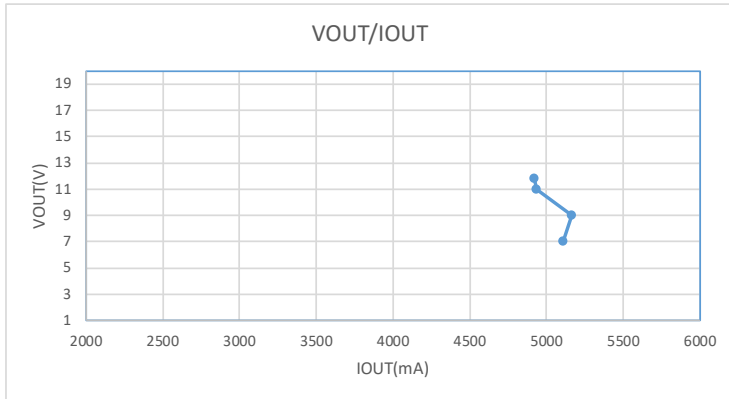

Efficiency Vs Output Power

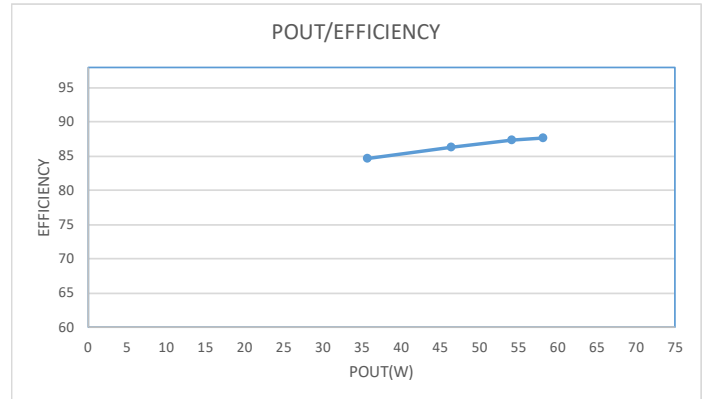


Operating Window (CC)

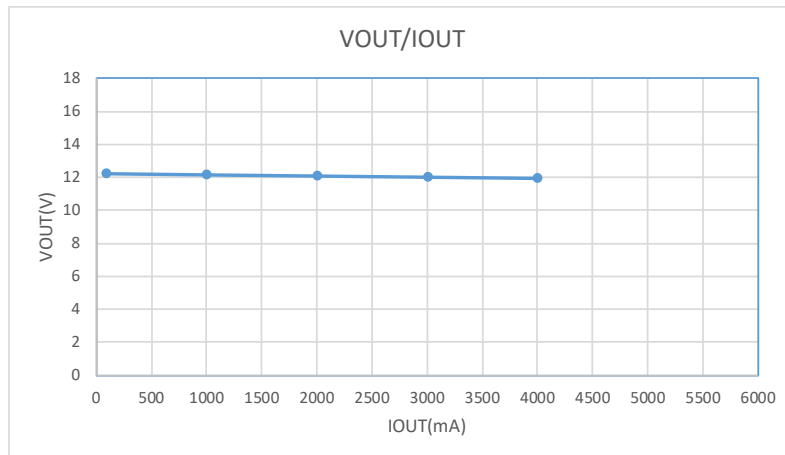

**Housing Properties**


Degree of protection	IP20
Casing	Polycarbonate, White

**Housing Dimensions**

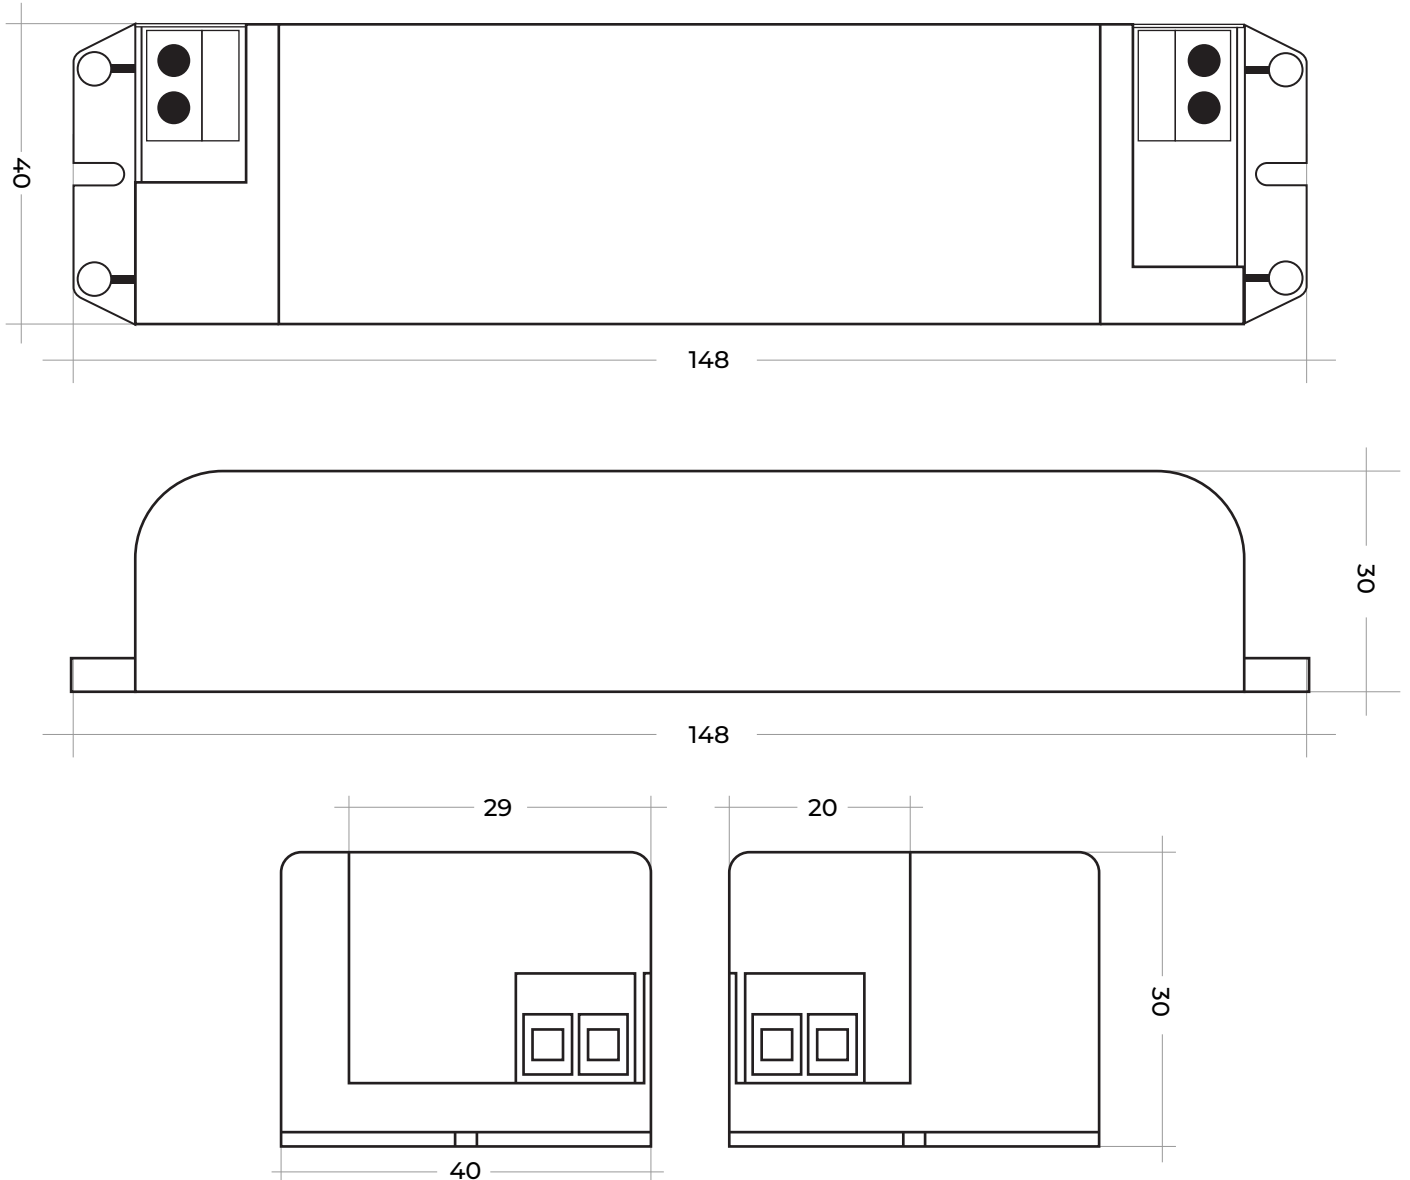

<b>Dimensions</b>	148*40*30mm
<b>Tolerance</b>	± 1mm
<b>Weight</b>	150 gm

**Wiring Diagrams**

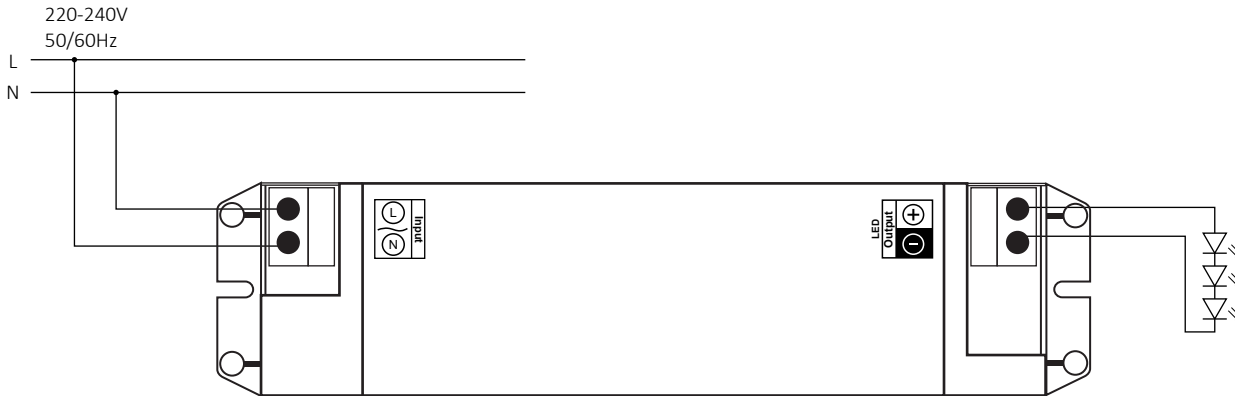

**Expected Lifetime**

Lifetime	30,000 hours
Warranty	2 years

**Logistics Data**

Model No.	VS60ISI125000F
Weight (gm)	150 gm